



HD video balun converter



The DW-BALUNHD is a passive, non-amplifier, video balun that allows for real-time analog and high definition video transmission via UTP up to 1000ft. The DW-BALUNHD is compatible with all AHD, TVI, CVI and CVBS analog cameras. The converter's superior interference and low emissions allows connecting the cameras to a recorder using an existing UTP infrastructure. The DW-BALUNHD has a built-in surge suppressor to protect against damaging voltage spikes and is crosstalk and noise immunity to ensure quality video signals.

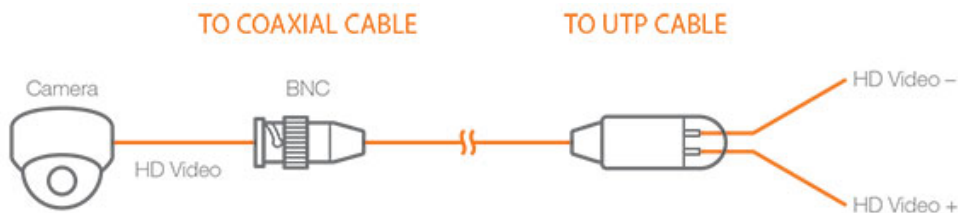

PASSIVE-PASSIVE UTP VIDEO TRANSMISSION

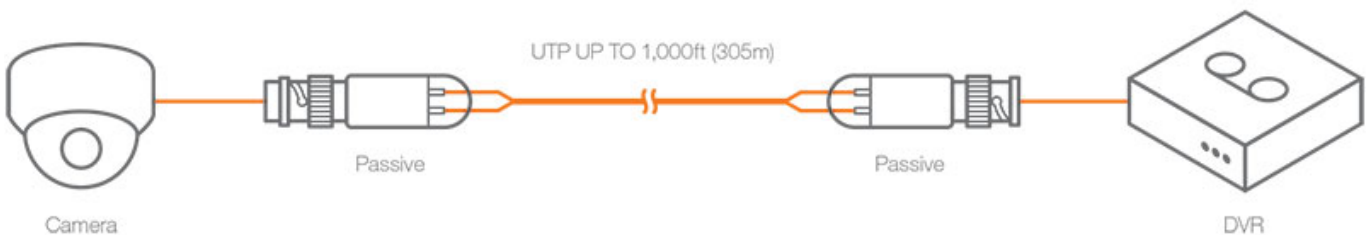

- Real-time transmission over UTP cat5e/6
- Compatible with all AHD, TVI and CVBS analog cameras
- AHD 720P : up to 1000ft (305m)



- AHD 1080P : up to 600ft (183m)
- TVI 720P : up to 1000ft (305m)
- TVI 1080P : up to 600ft (183m)
- CVI 720P : up to 800ft (244m)
- CVI 1080P : up to 400ft (122m)
- Push-pin Terminal Connection for UTP Cable
- 60dB anti-interference and noise reduction
- No External Power Required